



MADEINITALY

ailed from the heart of where terrazzo was first created in the north of Italy in the 15th century, these Italian-made terrazzo slabs are made by the best fabricators with over 25 years of "know-how".

The selection of the best raw materials and the use of advanced technologies creates a high quality and reliable product with excellent technical performances such as resistance, durability through the years and ease of maintenance.

The product is also sustainable, having a high percentage of pre-consumer recycled content. Only natural raw materials without any chemical addition are also carefully chosen, to improve the quality and safety in the areas where it will be laid.

A COLLECTION FOR ARCHITECTURAL AND INTERIOR



Made of White Cement



Modern & Versatile



Uniformity of colours on big surfaces



Eco-friendly



Competitive Price



Made in Italy





Only Natural Matter without any chemical substance



Anti - Slip Resistance R9



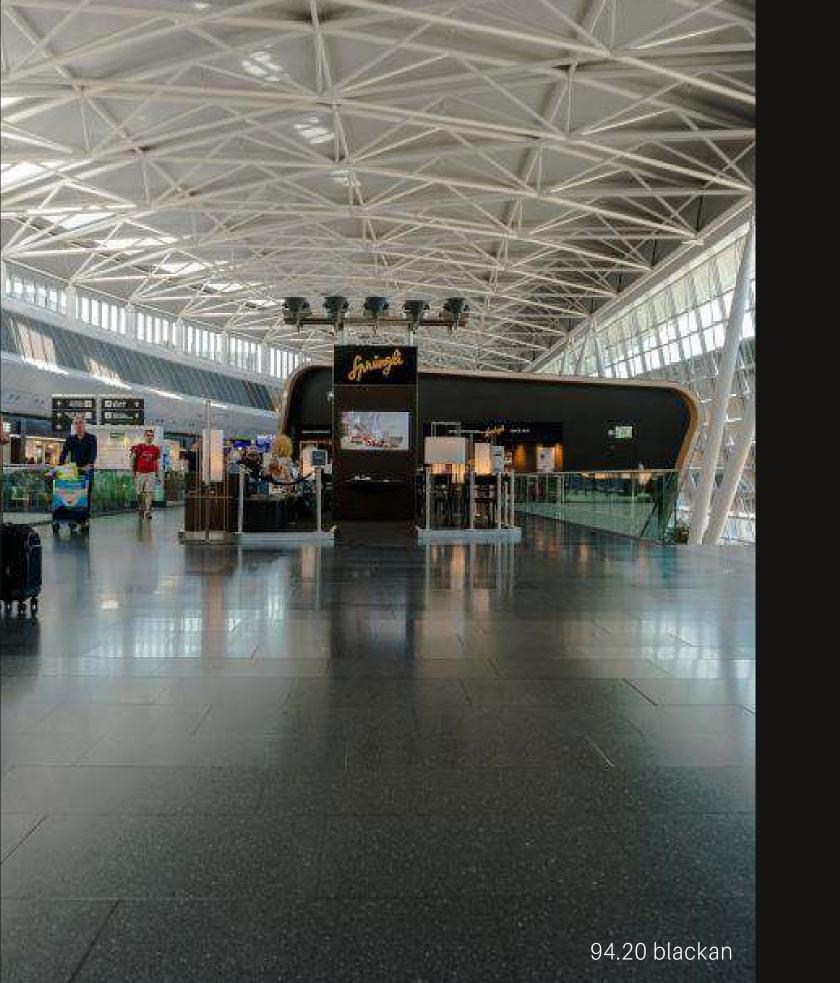

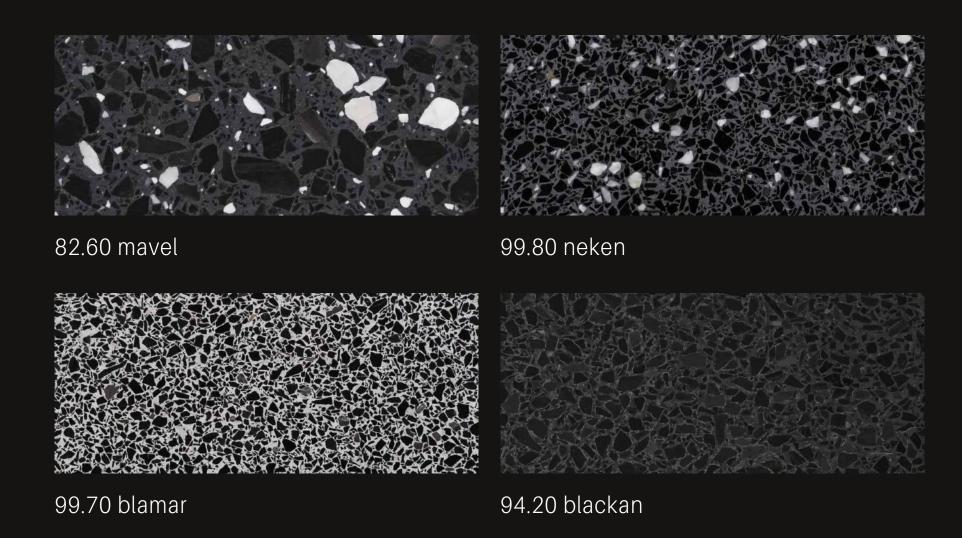



UJAGE



ENTRANCE



KITCHEN COUNTERTOPS



FLOORING



BATHROOM VANITY TOPS



TABLES/STANDS



RECEPTION DESKS



STAIRCASES



COUNTERTOPS




COFFEE TABLES




INDOOR WINDOW SILLS





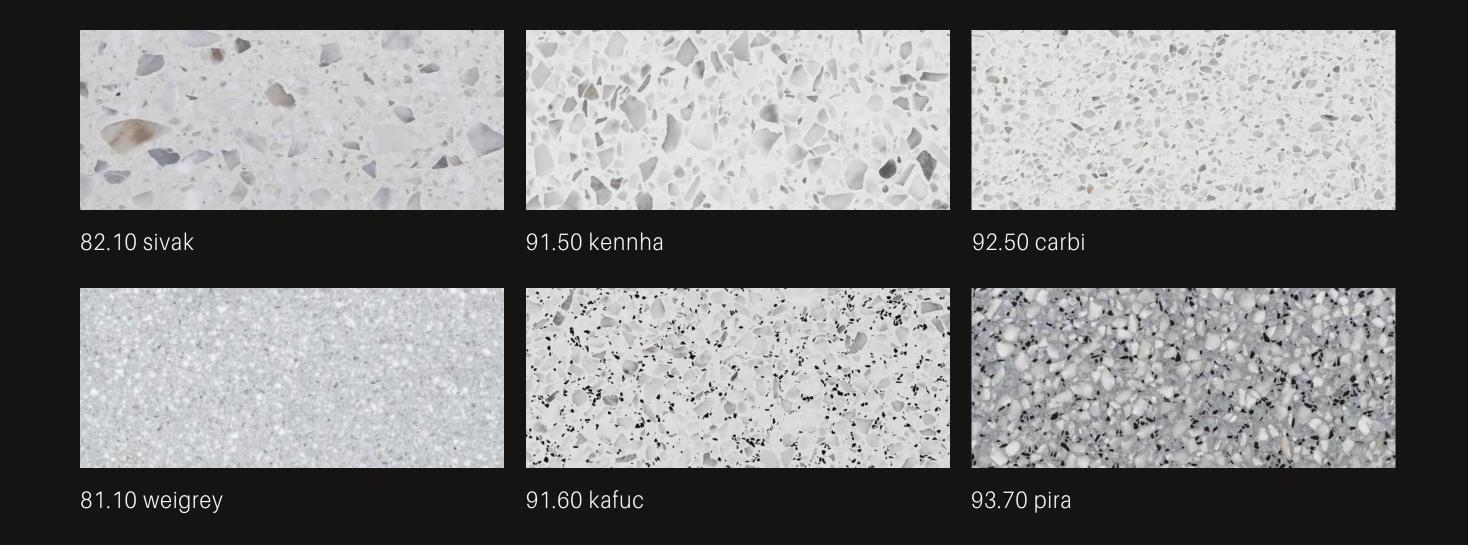

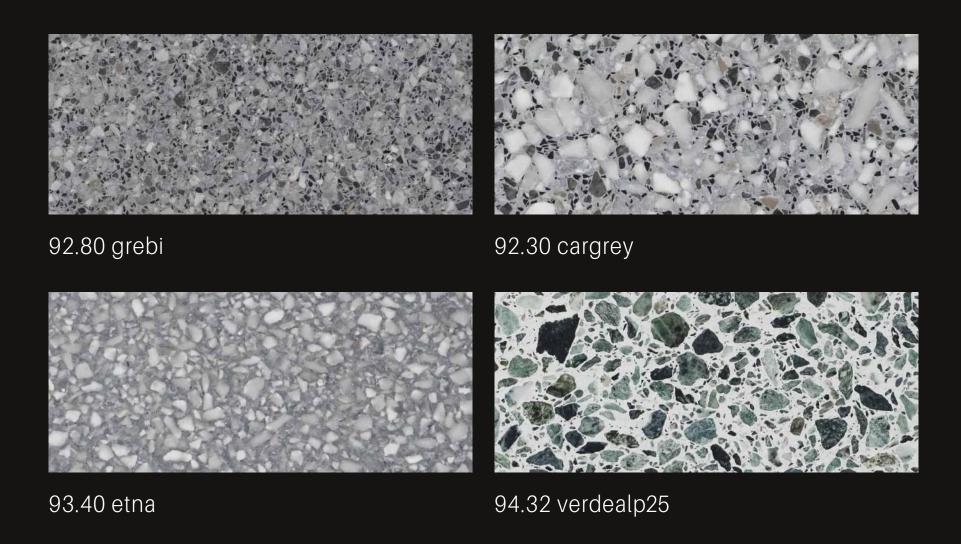

SPECIFICATION 1



Slab Sizes 305 x 125 cm, 305 x 140 cm



Thickness 2cm *other sizes is by indent basis



Bending Resistance 7.9 - 12.1 MPa.



Weight Resistance 52 kg/m²



Fire Resistant




Water Absorption 4.22 - 5.2% After impregnation 2 - 2.5%.



Abrasion Resistance Class


18 cm³ / 50cm² 20 cm³ / 50cm² 26 cm³ / 50cm²

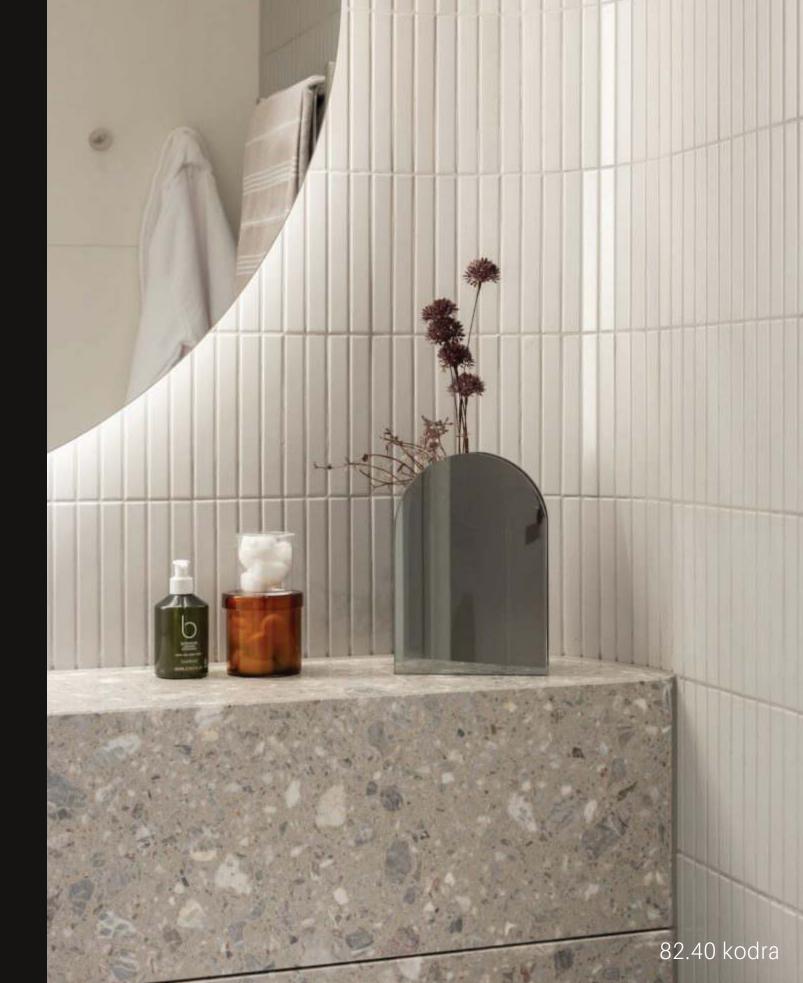











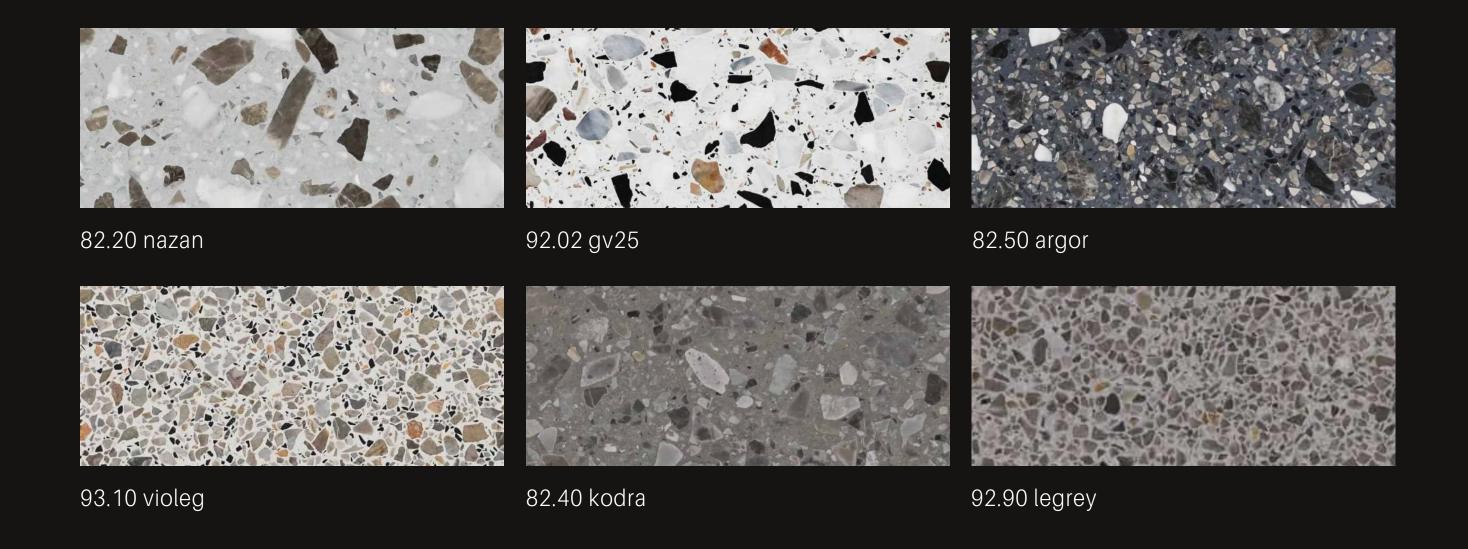

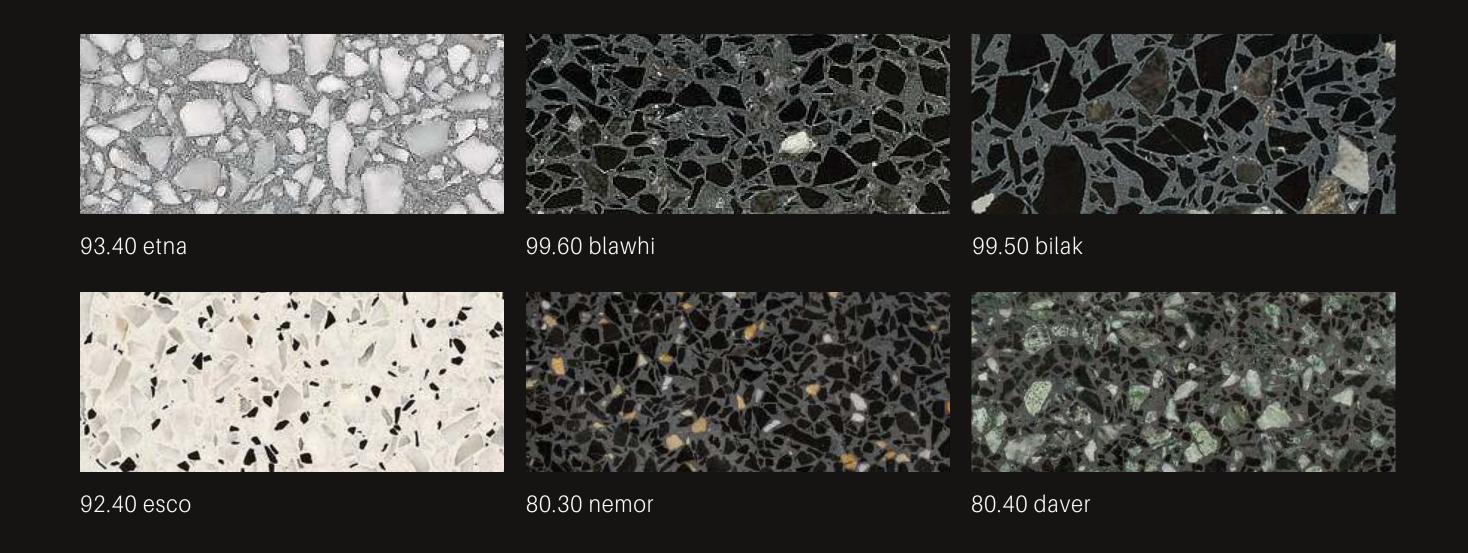

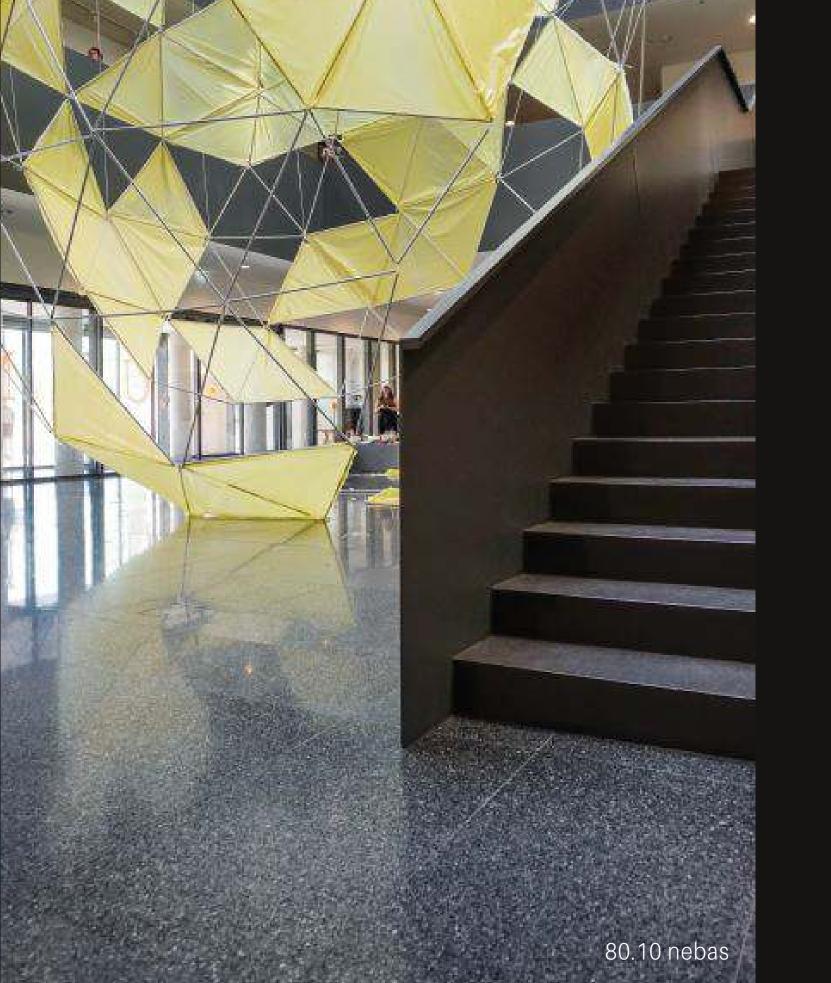


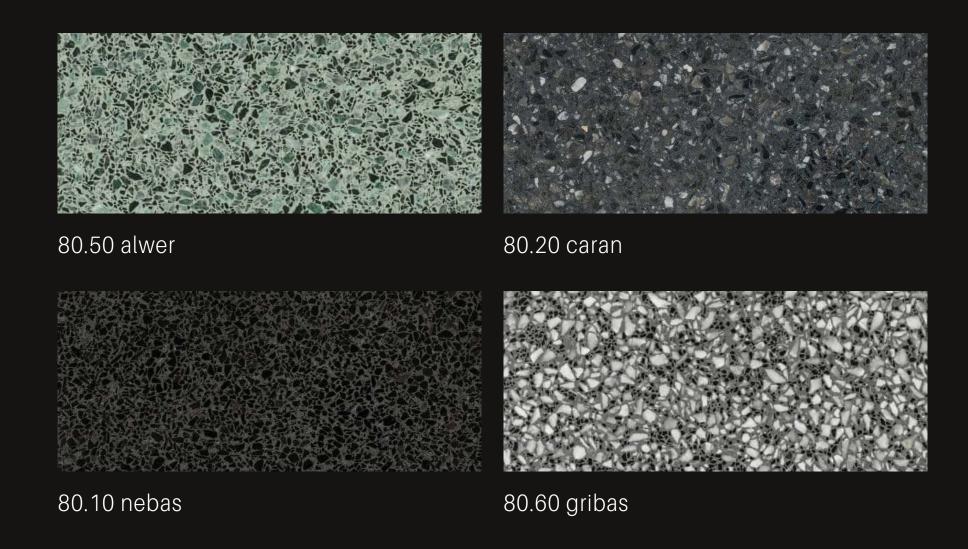

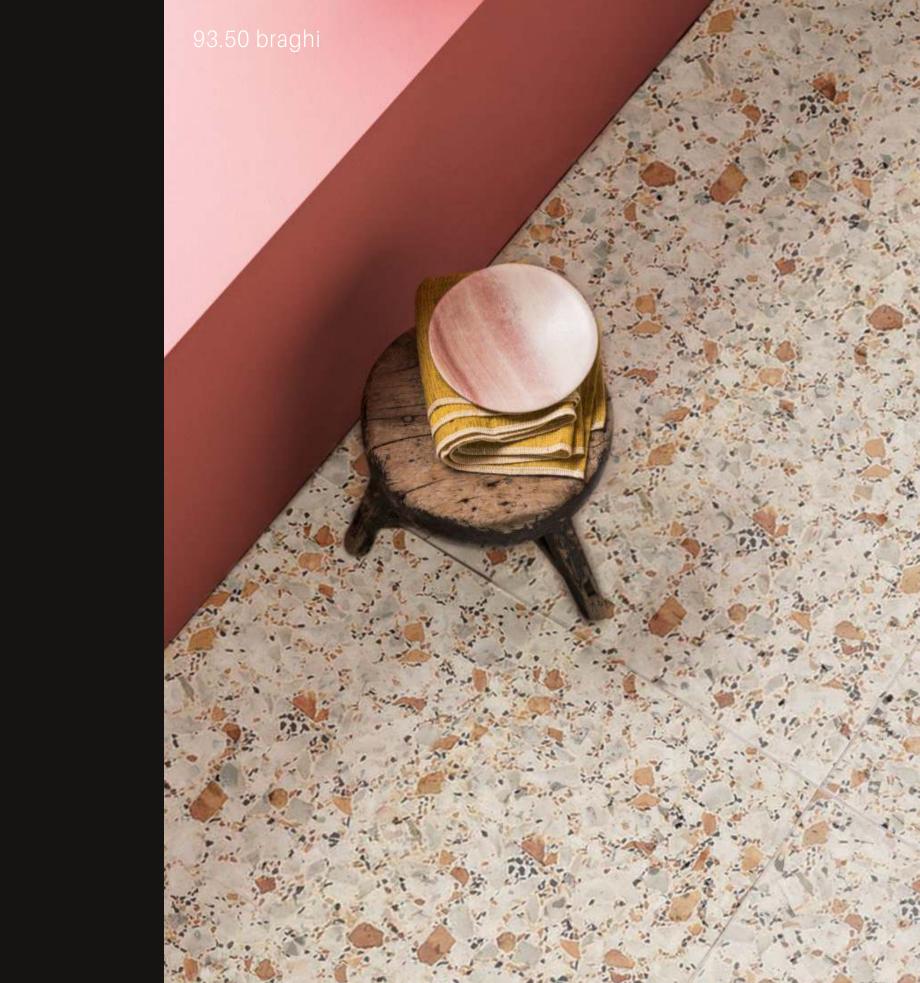





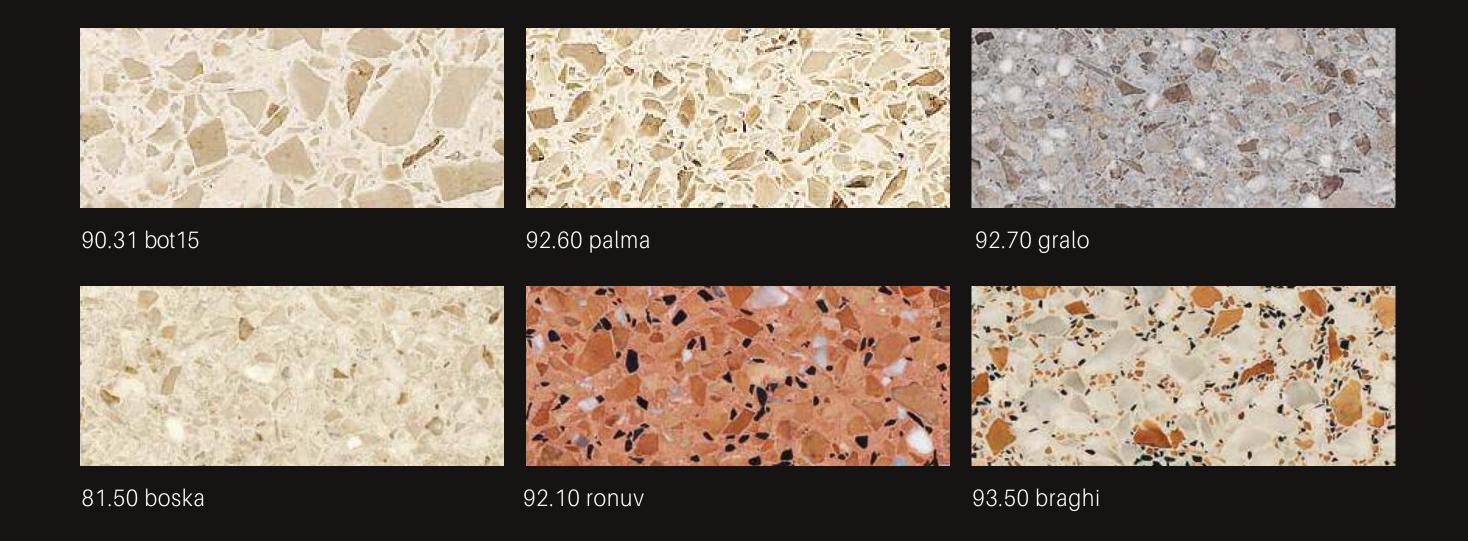





CARE AND MAINTENANCE

First Cleaning

Post-laying cleaning is very important to secure a lasting beauty and to maintain the high value of the material over many years. An inadequate or late first cleaning can alter the surface appearance.

Impregnation

Our experience of over 30 years and that of many layers shows the importance of laying untreated materials. Before filling and treating the terrazzo, it is necessary that the material become completely dry. The impregnation of material before the lying is not recommended, because the humidity of the material and of the mortar can't dry uniformly, but only through the open joints. The consequences of a not uniform drying can be difference of colours on the surface and cracking. The times for the completely dry of the material are approximately from 4 to 6 weeks. The wait times are only indicative and can change depending on weather and circumstances of the project.

Regular Cleaning

For a daily cleaning we advise to use only hot water with a ph neutral detergent, without additives.



FUTAR

Futar Enterprises Pte Ltd

19 Changi North Way Singapore 498786

Phone: +(65) 6543 3818 Fax: +(65) 6543 3789 www.futar.com.sg

Please contact: enquiry@futar.com.sg